

# POLE MOUNT POWER SUPPLY [PSP-xxW-xx-x]

Cable Products, Power Supplies

# TaiTin

## Description

The TaiTin PSP/PSS Series non-standby power supply units provide conditioned power to signal amplifiers in CATV and broadband distribution systems. Designed in a durable anodized aluminum housing (power coating available) with a high quality ferroresonant transformer, the PSP/PSS Series are available in both pole mount and strand mount versions.

TaiTin's non-standby power supplies have an efficiency rating of 90% or better, and are consistently reliable in terms of trouble-free maintenance and operation.

PSP/PSS Series utilize the ferroresonant transformer technology to provide line conditioning and voltage regulation (output - quasi square wave form).

The ferroresonant transformer design supplies the load with current-limited, regulated voltage free from spikes, surges and other forms of power line transients.


## Features

- Used for CATV / Broadband Networks Requiring an Efficient, Non-standby Power Supply; Ideally Suited for Pole Mounting Use
- Ferroresonant Design Provides Fully Regulated Output Voltage in a Quasi-Square Wave Form
- Overload Surge and Short Circuit Protection (Auto Reset Function) and Current Limiting Capability
- Auto Stable Function - Input Voltage Variation +/- 20% and Output Voltage Regulation +/- 3%. Other Input / Output Variability Available
- Housing Designed with Anodized Aluminum Material with Powder Coating (Available Option) for Durability and Corrosion Resistance
- Safety and Protection Features Based on Industry Standards
- Additional Features Include an External Lock and Internal Power Switch
- CE Certified

• **Additional Specifications Available Upon Request**



## Ordering Information

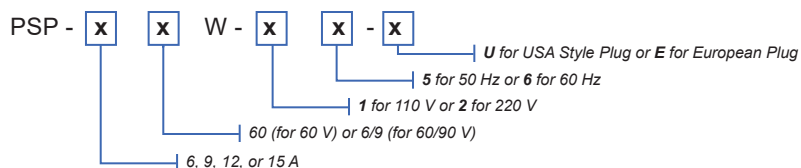

Model Number	Standard Carton	Dimensions	Carton Weight
PSP-660W-xx-x	1 pc	44.5 x 29.8 x 24.5 cm / 17.5 x 11.7 x 9.6 in.	16 kg / 35.2 lbs
PSP-960W-xx-x	1 pc	44.5 x 29.8 x 24.5 cm / 17.5 x 11.7 x 9.6 in.	18 kg / 39.6 lbs
PSP-1260W-xx-x	1 pc	44.5 x 29.8 x 24.5 cm / 17.5 x 11.7 x 9.6 in.	21 kg / 46 lbs
PSP-156xW-xx-x	1 pc	44.5 x 29.8 x 24.5 cm / 17.5 x 11.7 x 9.6 in.	22 kg / 48.5 lbs

Features	PSP-660W-xx-x	PSP-960W-xx-x	PSP-1260W-xx-x	PSP-1560W-xx-x	PSP-1569W-xx-x
Output Power	360 W	540 W	720 W	900 W	900 W
Output Current	6 A	9 A	12 A	15 A	15 A / 10 A
Output Voltage	60 V				60 V / 90 V
Output Waveform	Quasi-Square Wave				
Input Power Supply	110 V ± 20% or (220 V ± 20%)				
Input Frequency	50 or 60 Hz (± 3%)				
Input Power Factor	0.90 at Full Load				
Protection	Short Circuit Protection // Overload Current Limit // Start-up Output Delay // Output Surge Protection				
Operating Temperature	-40 °C ~ 55 °C (-40 °F ~ 131 °F)				
Warranty	2 years				

